

OUTRIGGER SPREADS & LOADS

FRONT
Outrigger Spread **30 ft 6 in**


REAR
Outrigger Spread **33 ft 10 in**

FRONT TO REAR
Outrigger Length **36 ft 11 in**

MAX FRONT
Outrigger Load **69,691 lbf**

MAX REAR
Outrigger Load **67,443 lbf**

* All dimensions and weights are approximate.

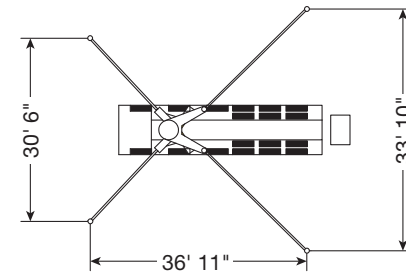

Booms over 47-Meters have high ground soil pressures that often require additional dunnage. Brundage-Bone has the expertise to set these big booms up properly, providing a safe work zone for everyone on the job site. Steel plates, crane pads or similar may need to be provided by the customer.